


Mounting a Craftmade Touch Push Button

1. Ensure power is turned off to the wired doorbell transformer
2. Connect the two wires at door (coming from wired doorbell transformer & wired doorbell) to the two screws on the back of the push button plate (figure 1).
3. After the touch button has been wired, install the mounting plate using the supplied screws (figure 2).
4. The touch button cover is installed by inserting the top wing of the bracket into the notch inside the cover (figure 3). Note: ensure the two rails inside the cover are pointed up. There's a small cut-out, or notch, where the wing from the mounting place will rest.
5. Push the cover flush with the wall and using a small flathead screwdriver, insert the set screw at the bottom of the housing.

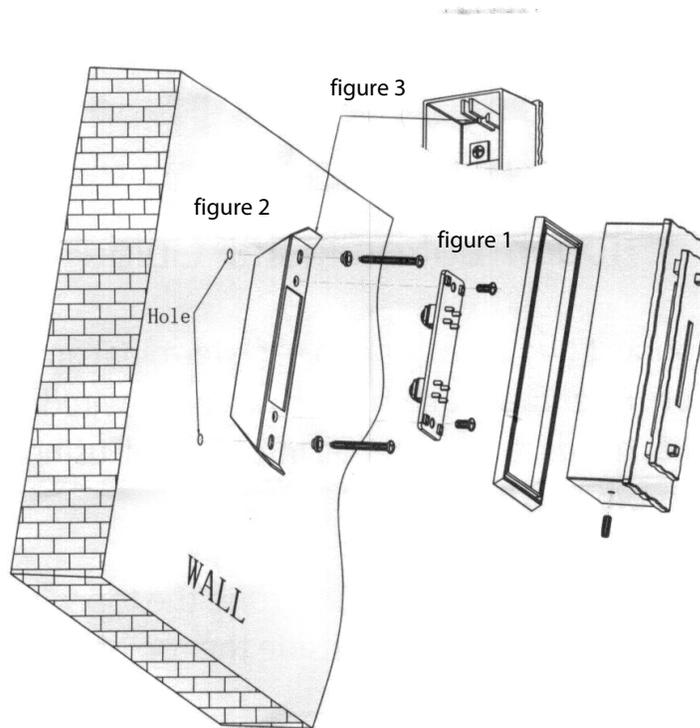

Note: If the chime triggers after touching any surface other than the touch-button, look for any metal touching any part of the touch button and cover that location on the touch button with a piece of electrical tape.